

# EFRP-S2502

## PowerSupplyfor2U Mini RedundantServers

### SPECIFICATION

ModelName  
→ EFRP-S2502

Size  
→ 2URedundant1+1

InputVoltage  
→ 100V-240V

Connectors

Mother BoardConnector20+4Pins	- 1
→ CoreVoltageConnector8Pins	- 1
Core Voltage Connector 4+4 Pins	- 1
PCI Express Connector 6+2 Pins	- 1
PCI Express Connector 6 Pins	- 1
SATA Power Connector	- 6
4PinPowerConnector	- 5
FDDPowerConnector	- 1


AmpereRating

Voltage	Amperage	Max.	Max.
+3.3V	- 25.0A	} 170W	} 500W
+5V	- 30.0A		
→ +12V	- 41.0A		
-12V	- 0.5A		
+5VSB	- 2.5A		

TotalOutput  
→ 500W+500W

RecommendedChasis

- SR-105
- RM-4002
- RM-423

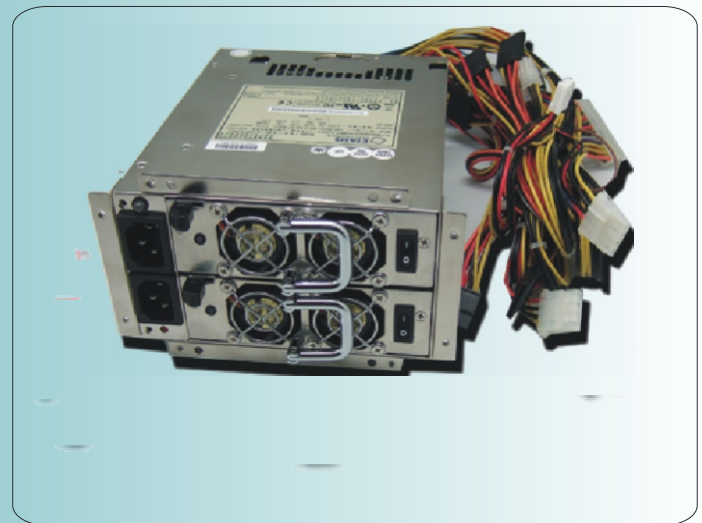

EFRP-S2502



PrimeSourceTechnologiesPvt.Ltd.  
Website:[www.primesource.in](http://www.primesource.in)