

FSP1000-50ABB


Server Powersupply

Specification



Model Name	FSP1000-50ABB										
Size	PS2 / Single										
Input Voltage	100 V - 240 V										
Connectors	<table> <tr> <td>Mother Board Connector 20+4 Pins</td> <td>- 1</td> </tr> <tr> <td>Core Voltage Connector 4+4 Pins</td> <td>- 3</td> </tr> <tr> <td>PCI Express Connector 6+2 Pins</td> <td>- 6</td> </tr> <tr> <td>SATA Power Connector</td> <td>- 14</td> </tr> <tr> <td>4 Pin Power Connector</td> <td>- 5</td> </tr> </table>	Mother Board Connector 20+4 Pins	- 1	Core Voltage Connector 4+4 Pins	- 3	PCI Express Connector 6+2 Pins	- 6	SATA Power Connector	- 14	4 Pin Power Connector	- 5
Mother Board Connector 20+4 Pins	- 1										
Core Voltage Connector 4+4 Pins	- 3										
PCI Express Connector 6+2 Pins	- 6										
SATA Power Connector	- 14										
4 Pin Power Connector	- 5										

	Voltage	Amperage	
Ampere Rating	+3.3 V	- 20.0A	} Max. 120W
	+5 V	- 20.0A	
	+12 V1	- 83.3A	
	-12 V	- 0.3A	
	+5 VSB	- 2.5A	

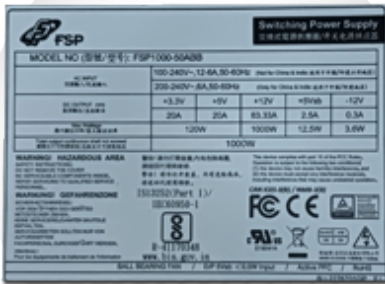

Total Output	1000 W												
Compatible Chassis	<table> <tr> <td>SR-105</td> <td>RM-423</td> </tr> <tr> <td>SR-108</td> <td>RM-4001</td> </tr> <tr> <td>TW-115</td> <td>RM-4002</td> </tr> <tr> <td>TW-125</td> <td>RM-4007</td> </tr> <tr> <td>IC-610</td> <td>RM-4081</td> </tr> <tr> <td>RM-3001</td> <td></td> </tr> </table>	SR-105	RM-423	SR-108	RM-4001	TW-115	RM-4002	TW-125	RM-4007	IC-610	RM-4081	RM-3001	
SR-105	RM-423												
SR-108	RM-4001												
TW-115	RM-4002												
TW-125	RM-4007												
IC-610	RM-4081												
RM-3001													



Prime Source Technologies Pvt. Ltd

www.primesource.in