

LSI 9361-8i

SPECIFICATION

Features

Host Adapter Architecture

- PCI Express 2.0 x8
- 12 Gb/s 8 Port SAS/SATA HDD via 2*SFF-8643 Mini-SAS HD
- RAID 0,1,5,6,10,50,60
- 1GB 1866MHz DDR III SDRAM
- Low Profile

Maintenance and Management Settings


- RAID Array Roaming
- Unplug/Remove RAID array
- Hot key (ctrl-h) boot-up RAID manager via BIOS
- Firmware update while running the Operating System
- Online capacity expansion (OCE)
- Online RAID level migration (ORLM)
- Fast Initialization for quick array setup
- Automatic RAID rebuild of HotSpare Drives
- Automatic drive (insert / removal) detection
- I/O Load Balancing
- Staggered Drive Spinup
- Rebuild Priority (Low - Highest)
- Spin Down Idle Mode
- Hot Swap and Hot plug
- S.M.A.R.T Support
- Multiple RAID array
- Multiple Logical Drive
- 64bit LBA support greater than 2TB per volume

RAID Monitoring Tools

- SMTP for email notification
- SES-2 enclosure management (Failed, SMART (SHI))
- Enclosure management support I2C Event Log

RAID Management Utilities

- Mega CLI (Command Line Interface)
- Mega RAID Storage Manager
- Web BIOS

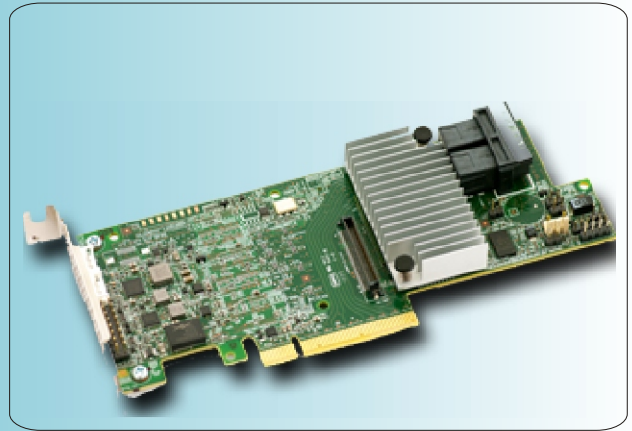

Operating System Support

- Windows Server 2008, Windows 7,8,10 (32/6 bit)
- Linux 1.0

Package Contents

- Controller Card
- Low Profile Bracket , High Profile Bracket

