

RH-1220

SPECIFICATION

Features

Host Adapter Architecture

- PCI-Express 2.0 x1
- SATA 6Gb/s Controller
- 2 Internal SATA Port
- Marvell 88SE9130 chipset
- Low Profile

Maintenance and Management Settings

- Hot key (ctrl-m) boot utility
- Hot swap and hot plug capability
- Power Efficient – Going Green Saves Green

Monitoring Tools

- Hard disk LED

Virtual Disk Support

- Capacity Mode (Best Performance)
- Safe Mode (Performance and Fault Tolerance)

Management Suite

- Web based management interface (MSU)

Operating System Support


- Microsoft Windows 7-32/64 bit
- Microsoft® Windows® Vista, Windows 2008, Windows 2003
- FreeBSD

Package Contents

- Controller Card
- Software CD(User Manual and Management Utility)
- Quick Installation Guide
- Low profile bracket
- Supplied with 2 SATA Cables

Operating Voltage

- PCI-Express : 3.3V/12V
- Power: 1W max/ 3W max

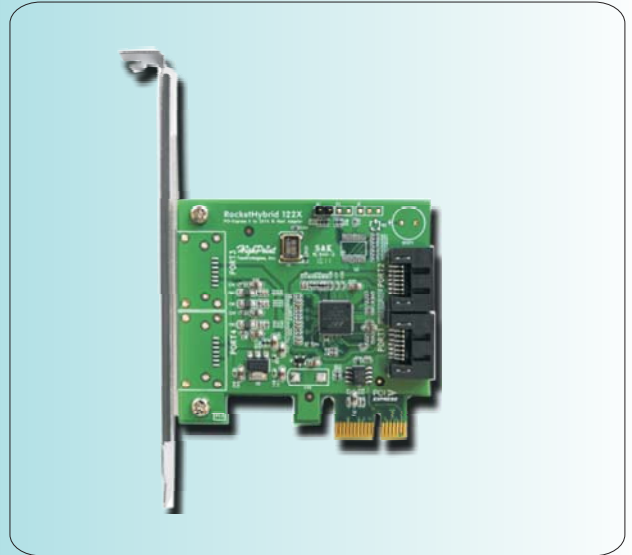

● RH-1220

